Canon

imageRUNNER ADVANCE

4245/4235/4225

Your Office Partner with Four Improved Values

4245

User-Centric

Intelligent Usability.

imageRUNNER ADVANCE was born targeting the ultimate ease of use. Based on customer feedback, that user-centric control has now been further improved. The theme is “intelligent usability.” Expanding the range of the “do-able” and enhancing both the process and the results, Canon puts more fun into the document workflow. The new imageRUNNER ADVANCE strengthens the connection with the business scene.

Your Office Partner with Four Improved Values

Usability, Color Scan, Sharing, and Management

Easier to Use than Ever Before

01 USABILITY

〔**Actual size**〕

Large, Legible, Easy to Use

8.4-inch LCD touch panel

Considering the environment, Canon provided an LED as backlight to provide increased illumination. The power key lights up in sleep mode to act as the power-saving key, allowing intuitive understanding of sleep mode and operation resumption.

Power-saving key

Changeable Button Display for Easier Use

Main Menu customization

The number of buttons and their display sequence on the Main Menu can be customized according to everyday work needs. It supports efficient operation with fewer errors and less delay.

Point

One-Touch Control Improves Efficiency

Custom Menu

Frequently used settings, such as "2 on 1/2-sided" or "Compact PDF/OCR," can be combined and registered for individual users. The target job can be performed with one-touch control.

Operation with Reduced Downtime and Effort

Point

Toner replacement and paper supply

Continuous run allows toner replacement while the device is in operation. Moreover, toner-setting errors are prevented because only the container cover to be exchanged opens. Each large-capacity cassette can load 680 sheets (64g/㎡). Paper size is detected automatically when loading paper.

Toner replacement

Point

Fast Operation from Power ON

High-Speed Start at Power ON*

With "High-Speed Start at Power ON," copy operation begins within 10 seconds of switching on the main power supply. The warm-up time is also reduced to less than 30 seconds and total copy workflow efficiency raised.

Improved Freedom of Installation Layout

Space-saving design

The compact design takes up just 565mm × 708mm of floor space, making it ideal for installation near a user's desk.



Color Universal Design (CUD) Certification Mark

This product has received the Color Universal Design (CUD) certification mark from the non-profit Color Universal Design Organization (CUDO) attesting that it can convey information to any user regardless of their color perception.

*High-Speed Start may not be available under certain conditions.

In this brochure, the imageRUNNER ADVANCE Series is referred to as "iR-ADV" wherever appropriate.

Responds Flexibly to a Multitude of Copy and Fax Needs

02 COPY

Easy-to-Read Finishing Reduces Costs

Automatic 2-Sided Copy and N on 1

Double-sided originals can be read automatically with Automatic 2-Sided Copy. In addition, multiple originals can be aggregated on one sheet of paper by simply selecting a layout from 2 on 1, 4 on 1, or 8 on 1. The result is one easy-to-read document and reduced paper costs.

Instant Copies Even in Mid-Operation

Point

Interrupt Copy

Users can temporarily stop the current job and give priority to a rush copy without stress.

Copy screen allows easy confirmation of current settings.
Easily supports high-volume copy needs.

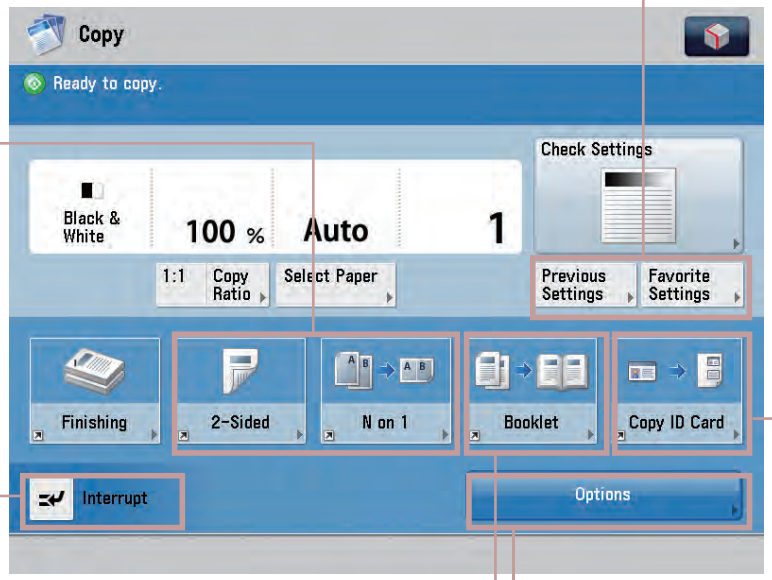

Preset Operation Raises Copy Workflow Efficiency

Favorite Settings and Previous Settings

Saving time and effort for each copy, the Favorite Settings function allows users to register frequently used settings. The Previous Settings key is also handy, recalling up to three registered copy settings.

Both Sides of a Card with 2 on 1 Copy

Point

Copy ID Card*1

Both sides of an ID card can be copied to a single sheet of paper with 2 on 1 format. Paper size and format are selected automatically, making it speedy and simple. Useful for copying double-sided driver's licenses, etc.

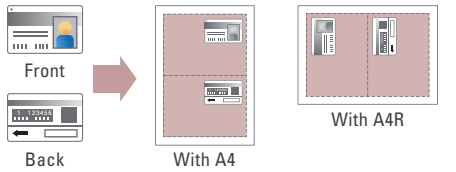

Create Easy-to-Read Booklet

Booklet

This function allows users to create saddle-stitch bound booklets by automatically copying originals to double-sided copies and then binding them with the saddle-stitch finisher.

Adds Page Numbers Too

Page Numbering



Page numbers can be added in a chosen position.

Print Stamp/Date on Copies to Deter Fraud

Watermark and Print Date

■Watermark

Simply choose your preferred font size and print a preset watermark.

■Print Date

Select the color, font size and format, and then print date.

Remove Shadows or Adjust Print Position

Erase Frame/Shift/Gutter

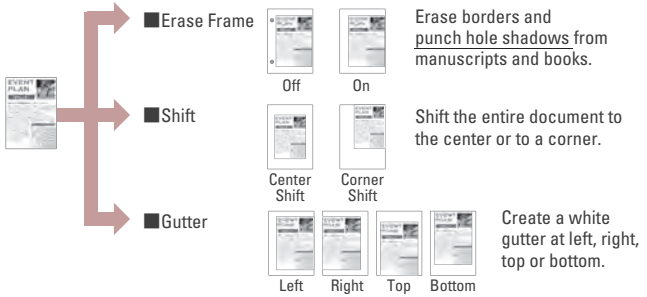

*1 Set the ID Card on the glass plate. Copy ID Card is not available when the card is set in the feeder. Compatible paper sizes are A4 and A4R. *2 Sold separately. *3 Requires an E-mail environment with mail server, etc. *4 Requires IP Fax Expansion Kit-A1. *5 Communication is immediate because the devices intranet connection via SIP server.

03 FAX

Paperless for Reducing Costs

Fax driver

Paperless transmission from the computer not only eliminates blur, but also reduces paper costs. In addition to IP Fax compatibility, efficient fax log management is available.

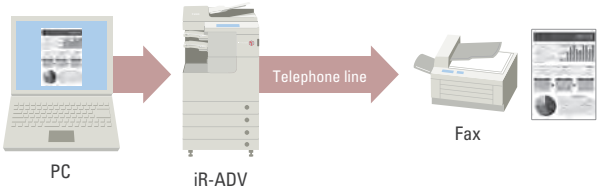

Efficient Fax Work

Point

Seiton Fax for MEAP ADVANCE*2+ imageWARE Desktop*2+ HOME-BOX2*2

Incoming faxes are given file names automatically for easy organization of fax documents. Users can send fax replies directly from their computer, since operations from File Receipt Notification to review, annotate and reply are all available on the desktop. Furthermore, using cloud storage, users can check fax documents from outside the office.

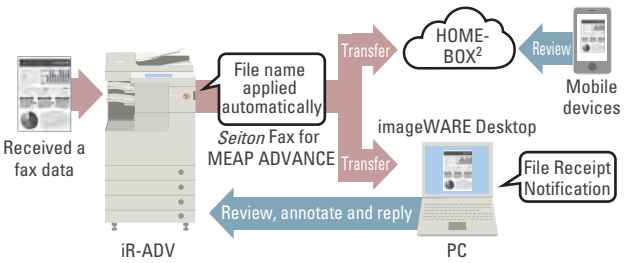

High-Speed Communication with Reduced Cost

Point

This series supports document communication over the internet, intranet or IP network via Internet Fax, Intranet Fax or IP Fax. Communication costs are greatly reduced because there are no fees generated per transmission.

■Comparison table

	I Fax		IP Fax*4 (in accordance with ITU-T standard T.38)
	Internet Fax*3 (in accordance with ITU-T standard T.37)	Intranet Fax	
Communication immediacy	× (via E-mail server)	○	○ (Real-time communication*5)
Image quality	Max. 600×600dpi	Max. 600×600dpi	Max. 400×400dpi
Delivery confirmation	▲ (Full Mode compatible*6)	▲ (Full Mode compatible*6)	○ (Real-time communication*5)
Destination format	E-mail address	IP address	Fax number etc.*7

■Internet Fax*3 & Intranet Fax

Internet Fax

Communicates using E-mail protocol without using telephone lines.

Intranet Fax

Communicates using SMTP protocol within an intranet without accessing an E-mail server. Realizes high-speed, high-quality communication between Canon machines.

■Intranet environment

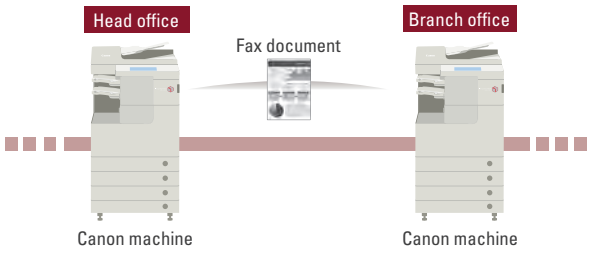

■IP Fax*4

Conforms to ITU-T standard T.38. Can be used in combination with an existing T.38 environment. In an intranet environment, such as corporate LAN, etc., it enables real-time communication between IP Fax equipment. (Ⅰ) It also offers significant cost reductions. For users contracted to Flets *Hikari* Next, IP Fax communication is supported using optical telephony. (Ⅱ) *8*9 In addition, destination phone numbers can be specified using SIP server.

Ⅰ. IP Fax (intranet environment)

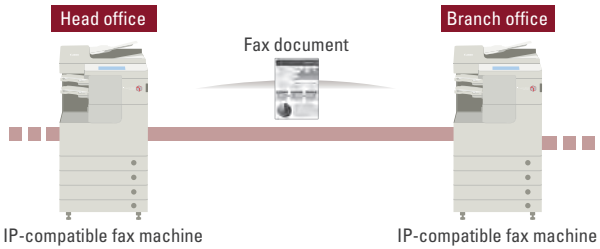

Ⅱ. IP Fax (NGN compatible)

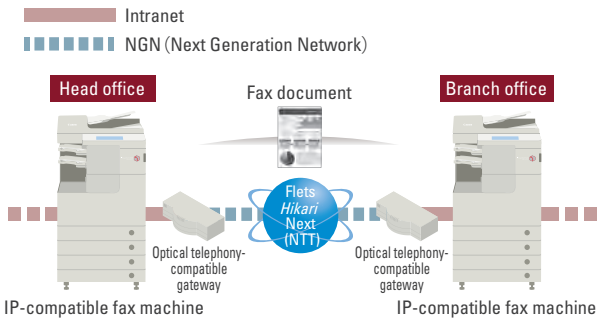

exchange information such as paper size, resolution, etc., directly. *6 Requires set up. *7 Destination format varies according to the connection environment. *8 NGN compatibility requires a contract (non-gratis) with NTT for both sender and receiver machines. *9 NGN connection can also be used along with an

Smoothly Handles Both Data Digitization and Output

04 SCAN&SEND

Address specification and other setup operations are easy to perform on the Scan and Send screen. Registering key sequences in the Favorite Settings (top right) further enhances operating efficiency. The color-scan function can be used effectively to quickly process full-color data.

Variety of Document-Sending Options

Supports multiple protocols

SMB Send function allows users to share information within an office without using any server. Sending with FTP/WebDAV protocols is also supported. Documents can also be sent by E-mail with a variety of settings in the similar way as on computers.

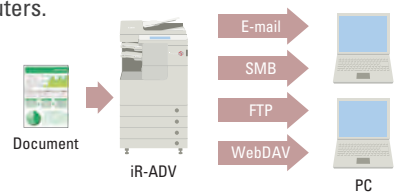

An Abundance of Variations to Meet any Requirement

Point

Adobe® PDF compatible

Encrypted PDF allows only authorized users with passwords to open the files, resulting in improved security. Moreover, a variety of PDFs can be generated: Compact PDF compresses the data capacity to approx. one tenth, reducing the load on networks and servers, while Searchable PDF*1 uses OCR processing to enable a full text search, etc.

■Application

Output file format	Data processing					
	High compression	OCR processing*1	Outline*1	Encryption	With Reader Extensions*1	Web view
PDF	○	○	○	○	○	○

Scanned Documents can be used as Microsoft PowerPoint Files

Point

Office Open XML compatible*1

During scanning, text data is added by OCR processing and graphic data by outline processing to create Office Open XML compatible files. Scanned documents can be used as Microsoft PowerPoint files. The time and labor required to input and edit paper document data are sharply reduced. It also promotes paper recycling.

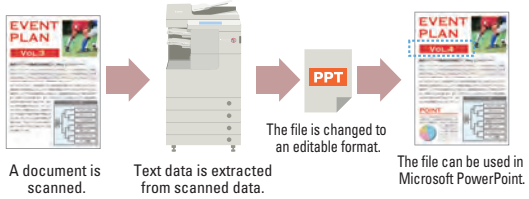
EVENT PLAN
PPT
A document is scanned.
Text data is extracted from scanned data.
The file is changed to an editable format.
The file can be used in Microsoft PowerPoint.

Simpler Digitization of Paper Documents

Point

Otegaru My Scan for MEAP ADVANCE*2

Without prior configuration, a scan button is created automatically for each user. Favorite Settings saves frequently used file names and scan settings for easy scanning. Passwords can also be set for the scan button for efficient scanning in response to daily operation.

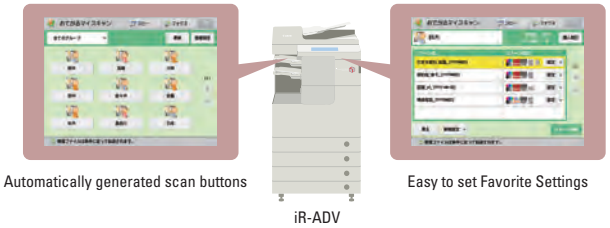

Easily Specify Destinations for Storing Documents

Document Navigator*2

Document Navigator allows users to directly specify folders for storing scanned documents by displaying the folder hierarchy on their own computers. Documents can be saved with appropriate names matching their content and purpose, eliminating the need to return to the computer to rename documents and reorganize folders.

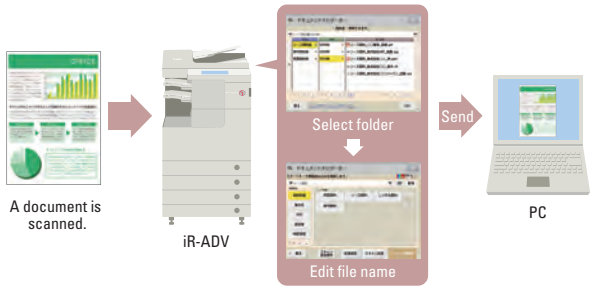

*1 Requires Scanning Solution Expansion Kit-A1. *2 Sold separately. *3.Requires PS Printer Kit-AY1. *4 Requires LIPS V Printer Kit-AY1. *5 When printing out PDF files, PS Printer Kit-AY1 or Direct Print Kit (for PDF/XPS) -J1 will be required. *6 Hard disk mirroring is recommended for data

05 PRINT

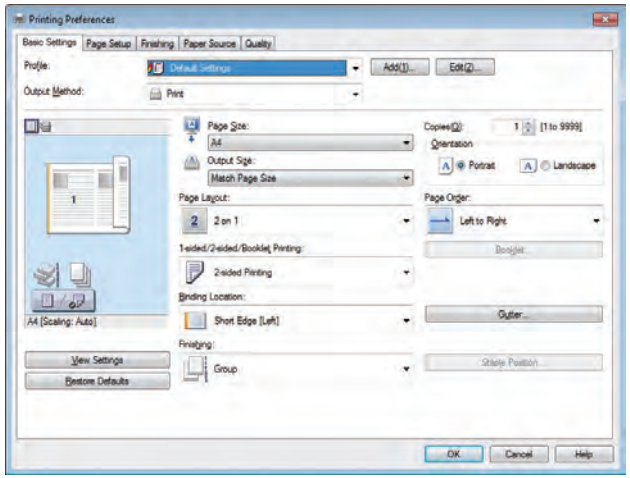

An easy-to-use, graphical user interface is provided. The print driver efficiently performs a variety of functions including paper selection, paper source and finishing.

Selectable PDL According to the OS and the Kind of Work

Multi-PDL compatible

Depending on the office needs, the OS, work content, etc., users can choose from multiple page description languages (PDLs) including Canon proprietary LIPS LX, which realizes high-speed data processing, Adobe® PostScript® 3™,*3 and LIPS V*4 that provides backwards compatibility with LIPS.

LIPS LX

Print from a Smartphone or Tablet PC

Canon Mobile Printing

Printing web pages or PDF files from mobile devices connected to wireless LAN access points is easy, using the iPhone ®, iPad ®, Android ™*5 compatible print application.

Point

Reduce Costs by Cutting Unnecessary Output

Erande My Print for MEAP ADVANCE*2

Print data is temporarily saved in memory and only the required job is selected and output from the user job list. It prevents unnecessary output and reduces costs. It is easy to install and requires no special set up.

06 STORAGE

Create a Serverless Document-Sharing Environment

Advanced Box*6

Advanced Box uses dedicated hard disk space on the printer for document sharing with SMB and WebDAV protocols. It enables document sharing between the imageRUNNER ADVANCE and computers on the same network without having to go through servers. It also allows users to preview images of documents using the touch panel.

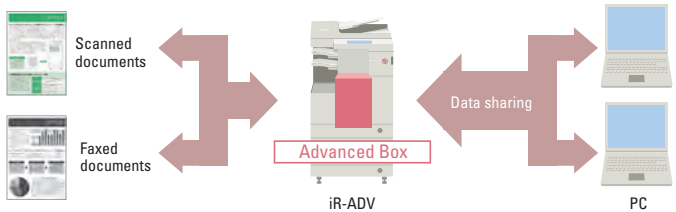

Print Out Documents as Needed

User Box

Storing scanned documents in the User Box makes it easy to print out repeatedly as necessary. The preview images allow quick and easy browsing of stored documents.

Easily Save Scanned Data to a USB

USB Thumb Drive

The imageRUNNER ADVANCE has USB ports on its side, allowing users to save scanned data onto USB thumb drive or to print out data*5 from USB thumb drive with ease.

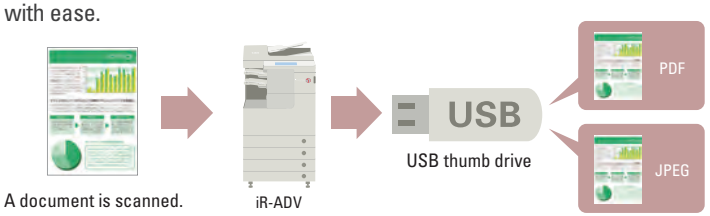

replication purposes. Requires HDD Data Encryption and Mirroring Kit-C4. It is the customer's responsibility to back up data at regular intervals. Otherwise, data might be irretrievably lost if a hard disk failure occurred.

Superb Operation with Full Awareness of Management, Security and the Environment

07 MANAGEMENT

Reduce Configuration and Operation Overhead

Point

Remote UI and Remote Operation

Remote UI enables integrated management from a desktop computer of all print function settings and of the Advanced Box. Furthermore, Remote Operation makes it possible to remotely operate the printer from a desktop computer using the same user interface as provided on the printer itself. It supports prompt management and operation in response to inquiries from a remote location.



Remote Instant Power Off

Point

Remote Shutdown

Remote UI allows users to turn off the power to the iR-ADV from the computer. In addition, using imageWARE Enterprise Management Console,*1 it is possible to switch OFF power all at once. As well as reducing management overhead during legal inspections, it also contributes to the reduction of power costs during long vacations.

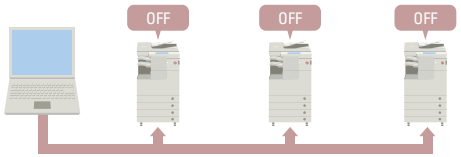

Enhance Security while Reducing Costs

IC Card Authentication Pro for MEAP ADVANCE*1*2

This system improves efficiency by enabling personal authentication using existing IC cards such as employee cards.*3 Security is improved while costs are reduced by the limitations imposed on users and functions.

Simple Management of Output for Each Department

Department ID Management

This feature enables output management and output volume control for copying, scanning and printing by each department, group, etc. Up to 1,000 departments can be registered and accessed by Department ID and PIN number, making management and control simple.

Print from Any Device to Avoid Unnecessary Prints and Unattended Print-outs

Serverless Anyplace Print for MEAP ADVANCE*1

Print data is temporarily held in the Advanced Box. Combined with IC-card authentication, this enables secure and serverless printing from any imageRUNNER ADVANCE in the same network. It prevents unattended prints-outs and reduces unnecessary prints because users only see their own job-list displayed.

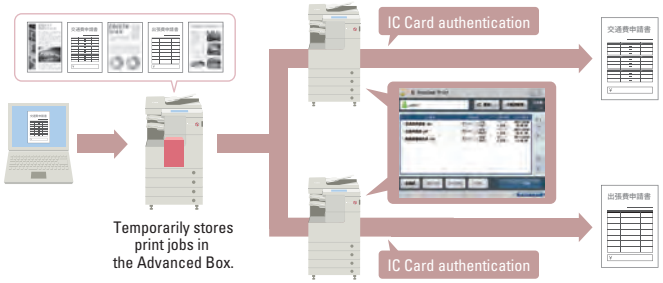

Prevent iR-ADV from Moving when in an Earthquake

Anti-Earthquake Kit*1

The Anti-Earthquake Kit lessens the chance of the iR-ADV and its peripherals moving or falling in an earthquake and causing injury or becoming an obstacle to evacuation. A simple-caster type that can be installed without fixing and a fixed-caster type are available.

■Simple-Caster Type

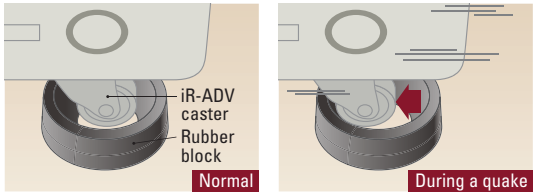

The iR-ADV casters fit within rubber blocks.

Friction prevents the iR-ADV casters from riding up the side of the rubber blocks.

*1 Sold separately. *2 Can be used with the Access Management System contained in this package to set restrictions on users and functions. *3 Also works with FeliCa, MIFARE and eLWISE card. *4 Requires HDD Data Encryption and Mirroring Kit-C4. *5 Requires the appropriate setup/settings

08 SECURITY

Security Measures for Safety

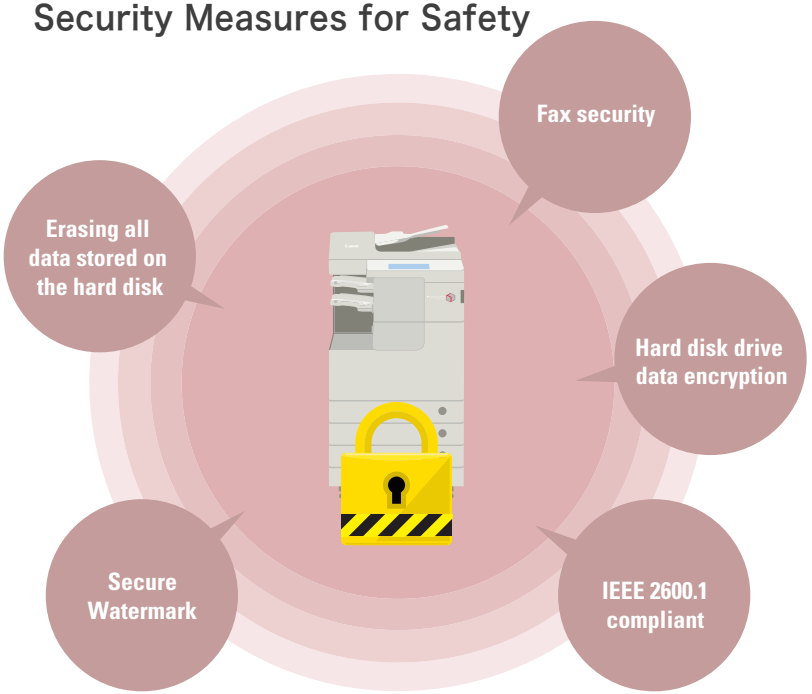
Fax security
Erasing all data stored on the hard disk
Hard disk drive data encryption
Secure Watermark
IEEE 2600.1 compliant

Prevent Data Leaks Caused by Unauthorized Copying

Secure Watermark

The standard feature Secure Watermark copies a pattern onto the background of the original. Since the background pattern emerges in subsequent copies, it effectively prevents unauthorized copying.

Point

Prevention of Wrong Transmission for Improved Confidentiality

Fax security

Wrong transmissions are prevented by the Confirm Entered Fax Number function and the Access Number Management function. Moreover, it conforms to FASEC1, the fax security function guideline for business use.

Point

Increasing the Confidentiality of Job Data

Erasing all data stored on the hard disk

Digital data generated on the hard disk drive when copying or printing documents is overwritten as soon as the job is finished. Moreover, it also features a hard disk drive lock function to prevent unauthorized access to internal hard disk drive data.

Point

Minimize the Risk of an Information Breach from the iR-ADV

Hard disk drive data encryption*4

By encrypting the data inside the hard disk drive, the risk of information being compromised if the printer is stolen or a similar case occurs is minimized. For hard disk drive data encryption, the iR-ADV contains a Canon MFP Security Chip with ISO15408 (Common Criteria) certification (EAL3), guaranteeing proper evaluation of its security performance.

Safety with International Security Certification

IEEE 2600.1*5

This device is compliant with the international standard on information security for multifunction printers, IEEE CC certificate 2600.1.

09 ENVIRONMENT

Point

Help to Reduce Power Use in Office

Low power consumption design

While improving the high-speed specifications, the unit maintains 129kWh/year (division c) *6 energy consumption efficiency, balancing excellent productivity with power savings. Moreover, it uses less than one watt of power in sleep mode.

Environmental Consciousness Backed with Long Duration / Low Power Use

LED Lighting

LED lighting is used to backlight the LCD. The lighting efficiency is greatly improved by raising the brilliance of the light guides.

Wide-ranging Response to Environmental Needs

Compliance with standards

The iR-ADV complies with Ecomark, the International ENERGY STAR Program, and the Law on Promoting Green Purchasing. It is also Compliant with the RoHS Directive, which bans the use of six hazardous materials.

Contribute to a Cleaner Environment

Bio-based plastic*7

Bio-based plastic certified by the Japan BioPlastics Association is used for the touch pen, which users touch each time they use the printer, and the buttons.

including options. *6 With the iR-ADV4245. Number of copiers and other MFPs as defined in the Energy Conservation Law (March 1, 2013). *7 Plant based plastics designed to reduce environmental footprint.

SPECIFICATION

Main Unit

Model Name		iR-ADV 4245/4245F	iR-ADV 4235/4235F	iR-ADV 4225/4225F
Type		Desktop		
Resolution (Scan)		600 dpi × 600 dpi		
Resolution (Print)		1200 dpi × 1200 dpi		
Halftone		256 gradations		
Acceptable Originals		Maximum size: A3 sheet, Book, Three-dimensional objects (maximum approx. 2 kg)		
Paper Sizes		A3, B4, A4, A4R, B5, B5R, A5R, Postcard*1*2, Double Postcard*1*2, Quarter-dividable Postcard*1*2, Custom size (99 mm × 148 mm to 297 mm × 431.8 mm), Envelope*1*3 (Kakugata 2, Nagagata 3, Yogatanaga 3)		
	Margins	Top: 4 mm, Left and Right: 2.5 mm, Bottom: 2.5 mm (3.5 mm: above B4, 5.5 mm: free size)		
	Paper Weight	Cassette: 60 to 128 g/㎡, Stack Bypass: 52 to 220 g/㎡		
Warm-Up Time	From Power on	30 sec. or less (Temperature: 20 deg C) (This is the amount of time that copier requires before it is able to make its first copy after pressing the main power by the start key operation) *When switching "High-Speed Start at Power ON" is set, the first copy can be used within 10 seconds by the start key operation. High-Speed Start may not start depending on usage.		
	From Sleep Mode	10 sec. or less (temperature: 20 deg C)		
First-Copy-Out Time*4		3.8 sec.		5.2 sec.
Copy/ Print Speed	A3	22 ppm		15 ppm
	B4	25 ppm		13 ppm
	A4	45 ppm	35 ppm	25 ppm
	B5	45 ppm	35 ppm	25 ppm
Magnification	Regular Paper Size	1:1±0.5 %, 1.15, 1.22, 1.41, 2.00, 4.00, 0.86, 0.81, 0.70, 0.61, 0.50, 0.25		
	Copy Ratio	25 to 400 % (in increments of 1 %)		
Paper Feeding System/ Capacity (64g/㎡)	Cassette	680 sheets × 2 + 680 sheets × 2 (Cassette feeding Unit AF1*5)		
	Stack Bypass	80 sheets		
	Deck	3,000 sheets (Paper Deck Unit-B2*5)		
Multiple Copies		999 sheets		
Power Requirement		100 V AC, 15 A, common to 50 Hz and 60 Hz		
Maximum Power Consumption		1.5 kW or less		
Energy Efficiency(MFP)*6		129 kWh/year (division c)	105 kWh/year (division c)	60 kWh/year (division c)
Dimensions (includes DADF)		565 mm(W) × 708 mm(D) × 902 mm(H)		
Weight (includes DADF)		Approx. 78 kg		
Installation Space*7		876 mm(W) × 708 mm(D)		
Memory Capacity		RAM/standard: 1256MB, maximum: 1768 MB*5, HD/standard: 160 GB, maximum: 1 TB*5		
Inner Tray Paper Capacity*8		250 sheets (A4, B5), 100 sheets (A3, B4, A4R, B5R, A5R)		
Additional Functions		Automatic Paper Selection, Auto Collate, Auto Orientation, Reserving Copy Jobs (up to 20 jobs), Interrupt Copy, Original Type Selection (Text/Photo, Photo, Text), Density Adjustment (Automatic/Manual), Finishing (Collate, Group, Stapler*5, Hole Punch*5), 2-Sided, Cover, Sheet Insertion (Chapter Page/Index Page), Booklet, Transparency Interleaving, Image Combination (2 on 1/4 on 1/8 on 1), Shift, Margin, Frame Erase, Job Done Notice, Different Size Originals, Job Build, Scan Image Check, Image Creation (Nega/Posi, Image Repeat, Mirror) Sharpness, From Composition, Job Lock*5, Secure Watermark, Page/Copy Set Numbering, Watermark/Print Date, Job Block Combination, Store in User Inbox, Job Clustering, Copy Sample Recall (interpolated 3 previous jobs), Mode Memory (interpolated 9 jobs), Copy ID Card, etc.		

*1 Available in Stack Bypass only. *2 Japan Post postcards *3 Please use envelopes for laser printer by Heart Co., Ltd. Using other envelopes may result in creased output or paper jam. *4 A4 landscape set on platen, paper election from first-drawer cassette and delivered to lower center tray. *5 Optional *6 Number of copiers and other MFPs as defined in the Energy Conservation Law (March 1, 2013). *7 When extending the Stack Bypass to the maximum length. *8 Please see specification for paper capacity with optional accessaries.

Automatic Document Feeder (Standard)

		iR-ADV 4245/4245F	iR-ADV 4235/4235F	iR-ADV 4225/4225F
Type		Duplex Automatic Document Feeder		
Original Size/Types	Paper Size	A3, B4, A4, A4R, B5, B5R, A5, A5R, B6		
	Paper Weight	1-sided original: B/W; 42 to 128 g/㎡, Color; 64 to 128 g/㎡, 2-sided original: B/W; 50 to 128 g/㎡, Color; 64 to 128 g/㎡		
Original Capacity		100 sheets (80 g/㎡)		
Scan Speed (A4R)	Copying	1-sided scan : 45 ipm 2-sided scan : 17 ipm	1-sided scan : 35 ipm 2-sided scan : 17 ipm	1-sided scan : 25 ipm 2-sided scan : 17 ipm
	Scanning (300 dpi)	1-sided scan: 51 ipm (color and B/W) 2-sided scan: 17 ipm (color and B/W)		

LIPS LX Printer (Standard)

Type		Embedded
Print Size		Based on the specifications of Main Unit
Print Speed		Based on the specifications of Main Unit
Resolution	Data Process	1200 dpi × 1200 dpi*1, 600 dpi × 600 dpi
	Print	1200 dpi × 1200 dpi
Page Description Language		LIPS LX
Supported Protocol		TCP/IP (LPD/Port9100/IPP/IPPS/SMB/FTP/WSD), IPX/SPX (NDS, Bindery)
Supported OS		Windows® XP/Windows Vista® /Windows® 7/Windows® 8/Windows® Server 2003/Windows® Server 2008/Windows® Server 2012, Mac OS X(10.5.8 or later)
Standard Font		N/A
Emulation	Standard	BMLinkS, TIFF/JPEG Direct Print
	Option	PDF/XPS Direct Print*2
Interface		USB2.0 High-Speed, 1000Base-T/100Base-TX/10Base-T(IEEE 802.3 -compliant)
Margins		5 mm in all directions Engine margin selectable in printer driver

*1 Text/Line only
*2 When installing the Direct Print Kit (for PDF/XPS)-J1

LIPS V Printer (Option)

Name		LIPS V Printer Kit-AY1
Type		Embedded
Print Size		Based on the specifications of Main Unit
Print Speed		Based on the specifications of Main Unit
Resolution	Data Process	1200 dpi × 1200dpi*1, 600 dpi × 600 dpi
	Print	1200 dpi × 1200 dpi*1
Page Description Language		LIPS V(LIPS LX, LIPS IV, LIPS III, LIPS II+)
Supported Protocol		TCP/IP(LPD/Port9100/IPP/IPPS/SMB/FTP/WSD), IPX/SPX(NDS, Bindery)
Supported OS		Windows® XP/Windows Vista® /Windows® 7/Windows® 8/Windows® Server 2003/Windows® Server 2008/Windows® Server 2012, Mac OS X(10.5.8 or later)*2
Standard Font	Japanese	Heisei-Mincho-W3, Heisei-Kaku-Gothic W5, Round Gothic, LinePrinter-Bold
	Alphabet	Courier, Swiss, Dutch, Symbol, All four font types and thirteen sets
	Other	Barcode(EAN-128, CODE39, NW-7, JAN, Postal Barcode, OCR font)
Emulation		ESC/P, N201, 15577, HP-GL, HP-GL2, BMLinkS
Interface		USB2.0 High-Speed, 1000Base-T/100Base-TX/10Base-T(IEEE 802.3 -compliant)
Margins		5 mm in all directions Engine margin selectable in printer driver

*1 when using LX Drivers Text/Line only
*2 LIPS LX only

PS Printer (Option)

Name		PS Printer Kit-AY1
Type		Embedded
Print Size		Based on the specifications of Main Unit
Print Speed		Based on the specifications of Main Unit
Resolution	Data Process	1200 dpi × 1200 dpi*1, 600 dpi × 600 dpi
	Print	1200 dpi × 1200 dpi
Page Description Language		Adobe® PostScript® 3™
Supported Protocol		TCP/IP (LPD/Port9100/IPP/IPPS/SMB/FTP/WSD), IPX/SPX (NDS, Bindery), Apple Talk (PAP)
Supported OS	Driver	Windows® XP/Windows Vista® /Windows® Server 2003/Windows® Server 2008/Windows® Server 2012, Mac OS X(10.5.8 or later)
	PPD	Windows® XP*2/Windows Vista® *2/Windows® 7*2/Windows® 8*2, Mac OS 9(9.1 or later)/Mac OS X(10.3.9 or later)
Standard Font	Japanese	Heisei-Mincho-W3, Heisei-Kaku-Gothic W5
	Alphabet	139 font types
Emulation		N/A
Interface		USB2.0 High-Speed, 1000Base-T/100Base-TX/10Base-T(IEEE 802.3 -compliant)
Margins		4 mm in all directions Engine margin selectable in printer driver

*1 Text/Line only *2 QuarkXpree only

Pull Scan Functions (Standard)

Type	Color scanner
Maximum Scan Size	Based on the specifications of Main Unit
Resolution*1(Main Scan × Sub Scan)	75, 150, 200, 300, 400, 600 dpi (adjustable in increments of 1 dpi from 75 to 600 dpi)
Scan Speed (A4R, 300 dpi, one-sided scan)	51 ipm (Color and B/W)
Interface	1000Base-T/100Base-TX/10Base-T (IEEE 802.3 -compliant)
Supported Protocol	TCP/IP
Supported OS	Windows® XP*2/Windows Vista® / Windows® 7/Windows® 8/Windows® Server 2003*2/Windows® Server 2008
Driver	TWAIN*3/WIA-compliant
Driver Operation Environment	Computers that above Software operate
Image Mode	Auto Switch between Color and B/W, Color, B/W (2), Gray Scale

*1 The optional Additional Memory Type A (512 MB) is required to scan in Gray scale, Full Color or Auto (Color) in color mode at resolution above 400 dpi. *2 TWAIN support only *3 In a 64-bit environment, TWAIN applications that can run in 32-bit virtual mode are only supported.

Advenced Box (Standard)

Disk Space	Standard: 15 GB, maximum*: 629.2 GB
Maximum Path Length	256 byte
Maximum Number of File per Directory	Interpolated 1,000 files (including folders)
Maximum Number of Files	Interpolated 100,000 files (including folders)
Maximum File Size	Interpolated 2 GB
Maximum Number of Clients for Simultaneous Access	SMB: 32/WebDAV: 12

* Option

Push Scan Functions (Standard)

Type		Color Scanner
Maximum Scan Size		Based on the specifications of Main Unit
Resolution*1(Main Scan × Sub Scan)		100 × 100 dpi, 150 × 150 dpi, 200 × 100 dpi, 200 × 200 dpi, 200 × 400 dpi, 300 × 300 dpi, 400 × 400 dpi, 600 × 600 dpi
Scan Speed (A4R, 300 dpi, One-sided Scan)		51 ipm (Color and B/W)
Interface		1000Base-T/100Base-TX/10Base-T (IEEE 802.3 -compliant)
Supported Protocol		SMB (TCP/IP)、FTP (TCP/IP)、SMTP (TCP/IP)*2、NCP (IPX)、WebDAV*3
Supported OS/ Application	SMB	Windows®XP/Windows Vista®/Windows®7/Windows®8/Windows® Server 2003/Windows®Server 2008/Windows®Server 2012, Samba 2.2/3.0 (Mac OS X 10.5.8/10.6, RedHat Linux9.0)
	FTP	Microsoft Internet Information Services Version 5.1/6.0/7.0/7.5/8.0, Mac OS X 10.5.8/10.6/10.7/10.8, RedHat Linux9.0, Solaris 10
	WebDVA	Microsoft Internet Information Services Version5.1/6.0/7.0/7.5/8.0、Apache2 (Mac OS X 10.5.8/10.6/10.7/10.8、RedHat Linux9.0、Solaris 10)
	SMTP	Microsoft Exchange Server 5.5 or later, Sendmail 8.93 or later, Lotus Domino R4.6 or later
Output Format	Single Page	TIFF (MMR)/JPEG/PDF/XPS
	Multiple Pages	TIFF (MMR)/PDF/XPS
Image Mode		Text, Text/Photo, Photo
Additional Functions		Compact PDF/XPS, PDF (Optimize for Web), PDF (Apply Policy), PDF/A-1b, PDF with Reader Extensions*4, PDF (Trace & Smooth)*4, Encrypted PDF/XPS*4, Searchable PDF/XPS (OCR)*4, Device Signature PDF*4, User Signature PDF*4, Time Stamp PDF*4

*1 The optional Additional Memorey type A (512 MB) is required to scan in Auto (Color/BW), Full Color, or Gray scale at resolution of 200 × 400, 400 × 400 or 600 × 600 dpi. *2 Supporting the encrypted communication (SSL) for SMTP authentication or SMTP sending *3 Supporting encrypted communication (SSL) *4 Option

IP Fax Functions (Option)

Name		IP Fax Estension Kit-A1
Original Size		A3, B4, A4, A4R, B5*1, B5R*2, A5*2, A5R*2
Scanning Line Density	Standard Mode	Based on the specifications of Fax Functions
	Fine Mode	Based on the specifications of Fax Functions
	Super Fine Mode	Based on the specifications of Fax Functions
	Ultra Fine Mode	Based on the specifications of Fax Functions
Communication Protocol		SIP, JT-T.38
Applicable Line		Ethernet (10Base-T/100Base-TX/1000Base-T)
Communication Mode		NGN, NGN my number, Intranet, VoIP Gateway

*1 To be sent as B4 size *2 To be sent as A4 size

The imageRUNNER ADVANCE Series has met various enviroment, security, and network standards and guidelines.

Fax Functions (Option/Standard on F model)

Name		Super G3 Fax Board-AP-1	G4 Fax Board-H1*1
Applicable Line*2		General telephone line, PSTN × 1(interpolated 4 lines*3 available using extension kit), Fax line	General telephone line (ISDN), Fax line (ISDN)
Scanning Line Density	Standard Mode	G3: 8 dot/mm × 3.85 line/mm	G3: 8 dot/mm × 3.85 line/mm G4: 200 × 100 dpi
	Fine Mode	G3: 8 dot/mm × 7.7 line/mm	G3: 8 dot/mm × 7.7 line/mm G4: 200 × 200 dpi
	Super Fine Mode	G3: 8 dot/mm × 15.4 line/mm	G3: 8 dot/mm × 15.4 line/mm
	Ultra Fine Mode	G3: 16 dot/mm × 15.4 line/mm	G3: 16 dot/mm × 15.4 line/mm G4: 400 × 400 dpi
Communication Speed		Super G3: 33.6 kbps, G3: 14.4 kbps	G4: 64 kbps, Super G3: 33.6 kbps, G3: 14.4 kbps
Encoding System		MH, MR, MMR, JBIG	
Communication Mode		Super G3, G3	G4, Super G3, G3
Original Size		A3, B4, A4, A4R, B5, B5R, A5, A5R	
Printable Paper Size		A3, B4, A4, A4R, B5, B5R, A5R	
Transmission Time		Approx. 2.6 sec.Using A4, CANON original paper, Standard mode, ECM (JBIG) sending	Approx. 1.8 sec.Using A4, CANON original paper, G4 Standard mode, JBIG Sending
Fax Driver	Interface	USB2.0 High-Speed、1000Base-T/100Base-TX/10Base-T(IEEE 802.3 -compliant)	
	Supported Protocol	TCP/IP（LPD/Port9100/SMB/WSD）、IPX/SPX（NDS、Bindery）	
	Supported OS	Windows®XP/Windows Vista®/Windows®7/Windows®8/Windows® Server 2003/Windows®Server 2008/Windows®Server 2012, Mac OS X (10.5.8 or later)	
Other Features*7		One Touch Button: 200 items*4, Address Book:1,600 destinations*4, Broadcast Sending:interpolated 256 destinations, Reserving Jobs:interpolated 64jobs, Available Sending Functions:Rotation Sending, Manual Sending, Memory Sending, Direct Sending, Line Designation, Senders Log, Sender Name (100 names), Job Done Notice, FAX Number Check, F-code, Password, Available Receiving Functions:Rotation Receiving, 2-sided Printing, Cassette Selection, Image Reduction, Receiving Log, 2on1 Log, Tel/Fax Auto Switching*5*6, Manual Receiving*5*6, On-hook*6, Remote Receiving*6, Output Tray Designation, Dial-in Receiving (Two destinations per one line)*6	

*1 When expanding G4 FAX Board, PCI Expansion Bus-F2is required. *2 In case of VoIP (Voice Over IP) line, data transmission is performed for each packet. However,fax communication may fail due to the loss of packet. *3 When using 4 lines, extension kit and also Additional Memory Type A (512 MB) are required. *4 One Touch or Address Book is common to the address book used for sending file or mail. *5 Option *6 G4 Fax Board does not support this feature.*7 Can use following functions when using the line1 (Super G3 Fax Board): Cordless Handset-wireless connection, Tel/Fax Switching, Remote Receiving, Incoming Call, On-hook

Internet/Intranet Fax Function (Standard)

Protocol	Internet Fax	SMTP*1(Send)/POP3*2(Receive)
	Intranet Fax	SMTP*1(Send/Receive)
Communication Mode		Simple Mode, Full Mode (ITU-T T.37-compliant and W-NET Fax-compliant)
Original Size		A3、B4、A4、A4R、B5、B5R、A5、A5R
Resolution (B/W)		200 × 100 dpi, 200 × 200 dpi, 200 × 400 dpi*3, 300 × 300 dpi*3, 400 × 400 dpi*3, 600 × 600 dpi*3
Supported Mail Server		Windows Exchange Server 5.5 or later, Sendmail 8.93 or later, Lotus Domino R4.6 or later

*1 Supporting the encrypted communication (SSL) for SMTP authentication and SMTP sending *2 Supporting the encrypted communication (SSL) for APOP/POP before SMTP or POP receiving *3 Depending on receiver's setting

Built-In 2 Hole Puncher-A1 (Option)

Paper Size	A3, B4, A4, A4R, B5, B5R
Paper Weight	52 to 220 g/㎡
Paper Type	Thin (52 to 59 g/㎡), Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Bond, Heavy1(91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡), Heavy3 (129 to 163 g/㎡), Heavy4 (164 to 220 g/㎡)
Number/Diameter of Punch Hole	Two Holes/6.5 mm
Interval between Punch Holes	80 mm
Mximum Power consumption	Main Unit/approx. 37 W
Dimensions/Weight	144 mm(W) × 531 mm(D) × 216 mm(H)/appro. 7.7 kg
Installation Space with Main Unit*	1,273 mm(W) × 708 mm(D)

*When extending the Stack Bypass and Auxiliary Tray to the maximum length, attaching Inner Finisher-D1

Inner 2-Way Tray-H1 (Option)

Paper Size		A3, B4, A4, A4R, B5, B5R, A5R, Postcard, Double Postcard, Quarter-dividable Postcard, Custom Size (99 mm × 148 mm to 297 mm × 431.8 mm), Envelope
Paper Weight		52 to 220 g/㎡
Paper Type		Thin (52 to 59 g/㎡), Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Pre-punched, Heavy1 (91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡), Heavy3 (129 to 163 g/㎡), Heavy4 (164 to 220 g/㎡), Tracing, Bond, Labels, Transparency, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Capacity	TrayA(lower)	250 sheets (A4, B5), 100 sheets (A3, B4, A4R, B5R, A5R)
	TrayB(upper)	100 sheets (A4, B5, A5R), 50 sheets (A3, B4, A4R, B5R)
Dimensions/Weight		427 mm(W) × 407 mm(D) × 76 mm(H)/Approx. 0.6 kg
Installation Space with Main Unit*		876 mm (W) × 708 mm (D)

*When extending the Stack Bypass to the maximum length

External 2 Hole Puncher-B2 (Option)

Paper Size	A3, B4, A4, A4R, B5, B5R
Paper Weight	52 to 220 g/㎡
Paper Type	Thin (52 to 59 g/㎡), Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Bond Heavy1(91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡), Heavy3 (129 to 163 g/㎡),Heavy4 (164 to 220 g/㎡)
Number/Diameter of Punch Hole	Two Holes/6.5 mm
Interval between Punch Holes	80 mm
Punch Holes Waste Capacity	Approx. 10,000 sheets (80 g/㎡)
Power consumption	Main Unit
Dimensions/Weight	107 mm(W) × 623 mm(D) × 908 mm(H)/appro. 7.2 kg
Installation Space with Main Unit	1,631 mm(W) × 708 mm(D)*1 1,749 mm(W) × 708 mm(D)*2

*1 When extending the Stack Bypass and Auxiliary Tray to the maximum length, attaching Staple Finisher- G1
*2 When extending the Stach Bypass and Auxiliary Tray to the maximum length, attaching Booklet Finisher- G1

Cassettes Feeding Unit-AF1 (Option)

Paper Size	A3, B4, A4, A4R, B5, B5R, A5R, Custom Size (139.7 mm × 182 mm to 297 mm × 431.8 mm)
Paper Type	Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Pre-punched, Heavy1 (91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡),
Paper Capacity/Number of Available Cassette	680 sheets (64 g/㎡) × 2 cassettes
Maximum Power Consumption	Main Unit/approx. 30 W
Dimensions/Weight	565 mm(W) × 650 mm(D) × 248 mm(H)/approx. 27.5 kg
Installation Space with Main Unit*	876 mm (W) × 708 mm (D)

*When extending the Stack Bypass to the maximum length

Inner Finisher-D1 (Option)

Paper Size		A3, B4, A4, A4R, B5, B5R, A5, A5R, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Paper Weight		52 to 220 g/㎡
Paper Type		Thin (52 to 59 g/㎡), Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Pre-punched, Heavy1 (91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡), Heavy3 (129 to 163 g/㎡), Heavy4 (164 to 220 g/㎡),Tracing, Bond, Labels, Transparency, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Tray Capacity	Standard Tray	Non-collate, Collate, Group: 1,000 sheets (A4, B5: interpolated 125 mm in height) 500 sheets (A3, B4, A4R, B5R, A5R: interpolated 62.5 mm in height), 500 sheets (for mixed size sheets: interpolated 62.5 mm in height) Collate (Shift), Group (Shift): 1,000 sheets (A4, B5: interpolated 125 mm in height) 500 sheets (A3, B4, A4R: interpolated 62.5 mm in height) Staple:30 copies (A4, B5: interpolated 125 mm in height) 30 copies (A3, B4, A4R: interpolated 62.5 mm in height) 30 copies (for mixed size sheets: interpolated 62.5 mm in height)
	Additional Tray	Non-collate, Collate, Group: 100 sheets (A3, B4, A4, A4R, B5, B5R, A5R: interpolated 12.5 mm in height) 100 sheets (for mixed size sheets: interpolated 12.5 mm in height) Collate (Shift), Group (Shift): 100 sheets (A3, B4, A4, A4R, B5, B5R: interpolated 12.5 mm in height) Staple:15 copies (A3,B4, A4, A4R,B5: interpolated 8.1 mm in height) 15 copies (for mixed size sheets: interpolated 8.1 mm in height)
Staple	Capacity	52 to 81 g/㎡: 50 sheets (A4, B5), 82 to 105 g/㎡: 30 sheets, 106 to 220 g/㎡: 2 sheets, 52 to 81 g/㎡: 30sheets (A3, B4, A4R), 82 to 105 g/㎡: 20 sheets, 106 to 220 g/㎡: 2 sheets
	Position	Corner/Double
Paper Size for Shifting		A3, B4, A4, A4R, B5
Paper Size for Staple		A3, B4, A4, A4R, B5
Maximum Power Consumption		Main Unit/approx. 49 W
Dimensions/Weight		697 mm(W) × 554 mm(D) × 295 mm(H)/approx. 13.5 kg (when additional tray for Inner Finisher-A1 is installed)
Installation Space with Main Unit*		1,163 mm (W) × 708 mm (D)

*When extending the Stack Bypass and Auxiliary Tray at a maximum length

Paper Deck Unit-B2 (Option)

Paper Size	A4
Paper Type	Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Pre-punched Heavy1 (91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡),
Paper Capacity/Number of Available Cassette	3,000 sheets (64 g/㎡) × 1 Cassette
Maximum Power Consumption	Main Unit/approx. 35 W
Dimensions/Weight	372 mm(W) × 603 mm(D) × 473 mm(H)/approx. 37 kg
Installation Space with Main Unit*	937 mm (W) × 708 mm (D)

*When extending the Stack Bypass to the maximum length

Staple Finisher-G1 (Option)

Paper Size		A3, B4, A4, A4R, B5, B5R, A5R, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Paper Weight		52 to 220g/㎡
Paper Type		Thin (52 to 59 g/㎡), Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Pre-punched, Heavy1 (91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡), Heavy3 (129 to 163 g/㎡), Heavy4 (164 to 220 g/㎡),Tracing, Bond, Labels, Transparency, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Tray Capacity	Standard Tray	Non-collate, Collate, Group:1,300 sheets (A4, B5, A5R: interpolated 188 mm in hight) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in hight) 650 sheets (for mixed size sheets: interpolated 96 mm in hight) Collate (Shift), Group (Shift): 1,300 sheets (A4, B5: interpolated 188 mm in hight) 650 sheets (A3, B4, A4R: interpolated 96 mm in hight) Staple:1,300 sheets/30 copies (A4, B5: interpolated 188 mm in hight) 650 sheets/30 copies (A3, B4, A4R: interpolated 96 mm in hight) 650 sheets/30 copies (for mixed size sheets: interpolated 96 mm in hight)
	Additional Tray	Non-collate, Collate, Group:1,700 sheets (A4, B5, A5R: interpolated 243 mm in hight) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in hight) 650 sheets (for mixed size sheets: interpolated 96 mm in hight) Collate (Shift), Group (Shift): 1,700 sheets (A4, B5: interpolated 243 mm in hight) 650 sheets (A3, B4, A4R: interpolated 96 mm in hight) Staple:1,700 sheets/30 copies (A4, B5: interpolated 243 mm in hight) 650 sheets/30 copies (A3, B4, A4R: interpolated 96 mm in hight) 650 sheets/30 copies (for mixed size sheets: interpolated 96 mm in hight)
Staple	Capacity	52 to 81 g/㎡: 50 sheets, 82 to 105 g/㎡: 30 sheets, 106 to 220 g/㎡: 2 sheets (A4, B5), 52 to 81 g/㎡: 30 sheets, 82 to 105 g/㎡: 20 sheets, 106 to 220 g/㎡: 2 sheets (A3, B4, A4R),
	Position	Corner/Double
Paper Size for Shifting		A3, B4, A4, A4R, B5
Paper Size for Staple		A3, B4, A4, A4R, B5
Maximum Power Consumption		Main Unit/approx. 85 W
Dimensions/Weight		648 mm(W) × 646 mm(D) × 1,097 mm(H) (When extending Auxiliary Tray)/approx. 46 kg
Installation Space with Main Unit*		1,524 mm (W) × 708 mm (D)

*When extending the Stack Bypass and Auxilliary Tray to the maximum Length

Booklet Finisher-G1 (Option)

Paper Size		A3, B4, A4, A4R, B5, B5R, A5R, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Paper Weight		52 to 220 g/㎡
Paper Type		Thin (52 to 59 g/㎡), Plain1 (60 to 63 g/㎡), Plain2 (64 to 90 g/㎡), Recycled, Color, Heavy1 (91 to 105 g/㎡), Heavy2 (106 to 128 g/㎡), Heavy3 (129 to 163 g/㎡), Heavy4 (164 to 220 g/㎡), Pre-punched, Tracing, Bond, Labels, Transparency, Postcard, Double Postcard, Quarter-dividable Postcard, Envelope
Tray Capacity	Upper Tray	Non-collate, Collate, Group:1,300 sheets (A4, B5, A5R: interpolated 188 mm in hight) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in hight) 650 sheets (for mixed size sheets: interpolated 96 mm in hight) Collate (Shift), Group (Shift): 1,300 sheets (A4, B5: interpolated 188 mm in hight) 650 sheets (A3, B4, A4R: interpolated 96 mm in hight) Staple:1,300 sheets/30 copies (A4, B5: interpolated 188 mm in hight) 650 sheets/30 copies (A3, B4, A4R: interpolated 96 mm in hight) 650 sheets/30 copies (for mixed size sheets: interpolated 96 mm in hight)
	Lower Tray	Non-collate, Collate, Group:1,700 sheets (A4, B5, A5R: interpolated 243 mm in hight) 650 sheets (A3, B4, A4R, B5R: interpolated 96 mm in hight) 650 sheets (for mixed size sheets: interpolated 96 mm in hight) Collate (Shift), Group (Shift): 1,700 sheets (A4, B5: interpolated 243 mm in hight) 650 sheets (A3, B4, A4R: interpolated 96 mm in hight) Staple:1,700 sheets/30 copies (A4, B5: interpolated 243 mm in hight) 650 sheets/30 copies (A3, B4, A4R: interpolated 96 mm in hight) 650 sheets/30 copies (for mixed size sheets: interpolated 96 mm in hight)
	Saddle Stitching*1	Maximum Capacity: 25 copies (depending on the size and the number of pages) 1 to 5 sheets/25 copies,6 to 10 sheets/15 copies, 11 to 16 sheets/10 copies
Staple	Capacity/ Position	Corner/Double:52 to 81 g/㎡: 50 sheets, 82 to 105 g/㎡: 30 sheets, 106 to 220 g/㎡: 2 sheets (A4, B5), 52 to 81 g/㎡: 30 sheets, 82 to 105 g/㎡: 20 sheets, 106 to 220 g/㎡: 2 sheets (A3, B4, A4R) Saddle Stitching: 52 to 81 g/㎡: 16 sheets, 82 to 105 g/㎡: 10 sheets (A3, B4, A4R)
Paper Size for Shifting		A3, B4, A4, A4R, B5
Paper Size for Staple		Corner/Double: A3, B4, A4, A4R, B5 Saddle Stitching: A3, B4, A4R
Maximum Power Consumption		Main Unit/approx. 113 W
Dimensions/Weight		766 mm(W) × 646 mm(D) × 1,097 mm(H) (When extending Auxiliary Tray)/approx. 75 kg
Installation Space with Main Unit*2		1,642 mm (W) × 708 mm (D)

*1 Punched pages not to be book-finished *2 When extending the Stack Bypass and Auxilliary Tray to the maximum length

PAPER HANDLING

＊This product does not include the Copy Tray.

Offers six-way paper feeding with a 5,800-sheet maximum capacity.
Enhanced options to achieve even more efficient and convenient paper handling.

Light, easy to handle automatic document feeder (standard)

Offers a paper capacity of 100 sheets (80g/m²). Inverts paper to scan both sides of a document.

Buffer Path Unit-H1

This unit needs to be attached to use the Staple Finisher-G1 or Booklet Finisher-G1.

Price (w/o tax) 30,000 yen

Staple Finisher-G1

The finisher provides a 50-sheet staple capacity (64g/m²), supporting corner and double stapling.

Price (w/o tax) 250,000 yen

Booklet Finisher-G1

The finisher delivers advanced in-line finishing capabilities with two output trays. It provides a 50-sheet staple capacity (64g/m²), supporting corner, double, and saddle stitch stapling.

Price (w/o tax) 420,000 yen

External 2 Hole Puncher-B2

The puncher needs to be attached along with the Staple Finisher-G1 or Booklet Finisher-G1 and brings punching capabilities to register 2 punch holes on the output.

Price (w/o tax) 60,000 yen

Inner Finisher-D1

The finisher can be installed in the central output section of the Main Unit. It provides a 50-sheet staple capacity (64g/m²), supporting corner and double stapling.

Price (w/o tax) 120,000 yen

Built-in 2 Hole Puncher-A1

The Built-in 2 Hole Puncher can be mounted on the Inner Finisher-D1.

Price (w/o tax) 50,000 yen

＊The photo shows Inner Finisher-D1, Built-in 2 Hole Puncher-A1 and Inner Finisher Additional Tray-A1(price (w/o tax): 20,000 yen) installed.

Inner 2-Way Tray-H1

The Inner 2-Way Tray-H1 brings a two-way paper output system to the basic configuration of the imageRUNNER ADVANCE Series, to sort output.

Price (w/o tax) 10,000 yen

Stack Bypass (Standard)

The Stack Bypass provides a paper capacity of 100 sheets (64g/m²).

2 × 680-Sheet Cassettes (Standard)

The standard paper cassettes provide a paper capacity of 680 sheets (64g/m²) per cassette.

Paper Deck Unit-B2

It can be installed on the right side of the Main Unit, holding up to 3,000 A4-sized sheets (64g/m²), to meet volume printing needs.

Price (w/o tax) 230,000 yen

Cassette Feeding Unit AF-1

It provides a paper capacity of 680 sheets (64g/m²) per cassette, supporting mixed-size printing to improve productivity.

Price (w/o tax) 150,000 yen

iR-ADV Pedestal-B1

The pedestal provides space to store paper stocks or manuals at the bottom of the Main Unit.

Price (w/o tax) 50,000 yen

iR-ADV Caster Plate-B1

The caster allows for device operation in a seated position.

Price (w/o tax) 30,000 yen

＊This photo shows the imageRUNNER ADVANCE 4245F model with the Cassette Feeding Unit-AF1.

Product Lineup

4245/4245F

- Copy/print speed ····· 45ppm
- First-Copy-Out time (FCOT) 3.8sec.
- Scan speed (A4,landscape,1-sided,at a resolution of 300dpi)
- COLOR ····· 51ipm
- BLACK & WHITE ····· 51ipm

When the optional Cassette Feeling Unit-AF1, Booklet Finisher-G1, Buffer Path Unit-H1, Built-In 2 Hole Puncher-B2, and Paper Deck Unit-B2 are attached.

4235/4235F

- Copy/print speed ····· 35ppm
- First-Copy-Out time (FCOT) 3.8sec.
- Scan speed (A4,landscape,1-sided,at a resolution of 300dpi)
- COLOR ····· 51ipm
- BLACK & WHITE ····· 51ipm

When the optional Cassette Feeding Unit-AF1, Inner Finisher-D1, and Inner Finisher Additional Tray-A1 are attached.

4225/4225F

- Copy/print speed ····· 25ppm
- First-Copy-Out time (FCOT) 5.2sec.
- Scan speed (A4,landscape,1-sided,at a resolution of 300dpi)
- COLOR ····· 51ipm
- BLACK & WHITE ····· 51ipm

When the optional Cassette Feeding Unit-AF1, and Inner 2-Way Tray-H1 are attached.

Main Unit pricing (w/o tax)

4245 ••• 1,650,000 yen	4225 ••• 1,200,000 yen
4245F •• 1,750,000 yen	4225F •• 1,300,000 yen
4235 ••• 1,450,000 yen	
4235F •• 1,550,000 yen	

For product information,

Home Page Canon Marketing Japan Corporate Information (English)

canon.jp/8060e

*Product information can also be checked from a mobile device.

Built-in Service Technician Tools

The imageRUNNER ADVANCE Series provides the following built-in service technician tools designed for prompt delivery of required services when trouble occurs. Service technicians use these tools upon customer's assent.

- Service Technician Browser: Accesses the device web portal and views troubleshooting and countermeasure examples and other relevant information at a customer site.
- Updater: Downloads the latest firmware over the Internet at a customer site.

To use the product safely:
- Before using the product, read the product documentation carefully and thoroughly.
- Use the product only within the specified output power and input oltage.

TOP PARTNER

●Purchase Canon products at our store that you can always trust.

●Design and specifications are subject to change without notice, due to product improvements. The contents of this brochure are based on the design and specifications as of November, 2013. ●The pricing does not include photosensitive unit and consumables pricing as well as the corresponding consumption tax for each accessory. Consumption taxes will be added when you purchase the main unit, optional accessories, or consumables or when you ask your service technician for assistance. ●Maintenance services are required at regular intervals. Ask your sales representative for costs and consumables pricing. ●Performance components which are part of required maintenance services will be kept in store for a minimum of 7 years after the product went out of production. (Performance components are components required to maintain product performance.) ●Microsoft, Windows, and Windows Vista are trademarks of Microsoft Corporation, registered in the US and other countries. ●Apple and Macintosh are trademarks of Apple Computer, Inc., registered in the US. ●Adobe, PostScript, PostScript 3, and the PostScript logo are trademarks of Adobe Systems Incorporated, registered in the US. ●Android is a registered trademark of Google Inc. ●IPX/SPX is a trademark of Novell Inc., registered in the US. ●Canon, the Canon logo, imageRUNNER, Satera, and imageWARE are registered trademarks of Canon Inc. ●BMLinkS is the registered trademark of the Japan Business Machine and Information System Industries Association. ●All other trademarks are the property of their respective owners. ●Copy samples provided in this brochure may differ from actual output. ●Screenshots provided in this brochure are edited.

Warning:
- Possession of copies may be subject to punishment for violation of the law. These include:
  ① Currencies in circulation within and outside this country, government securities, and government and regional bond certificates
  ② Unused postal stamps and postcards
  ③ Duplicated government stamps
- Copying copyrighted material, such as books, music, paintings, block prints, maps, movies, drawings, or photos, is prohibited except for personal, family, or other limited use.
- A designated administrator is required for management and control of this product to prevent unauthorized copying.

Canon Canon Inc.
Canon Marketing Japan Inc.
CANON STOWER 2-16-6 Konan, minato-ku, Tokyo, 108-8011 Japan

As of November, 2013